


ExpressCard Adapter

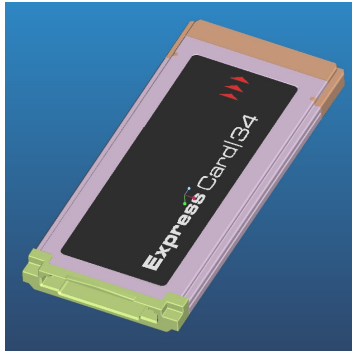

Product Features

- * Pin protection
- * Readily usable for 4 types of SD Memory Card, Multi Media Card, Memory Stick and xD Card
- * Available for reflow soldering
- * Preventing xD card from reverse, upside-down and reverse upside down inserting
- * Preventing Memory Stice card from reverse and upside-down inserting

Contact TaiSol for

Alternative material and solution requirements

TaiSol Group

Taiwan

Tel: 886-2-265-2658
Fax: 886-2-2656-2659
E-mail: Sales@taisol.com.tw

U.S.A

Tel: 1-650-861-9555
Fax: 1-650-655-7201
E-mail: sales@taisol.com
Singapore(S.E.Asia)

Tel: 65-567-3008
Fax: 65-567-3088
E-mail: sales@taisol.com.sg


China(Shanghai)

Tel: 86-21-5821-8606
Fax: 86-21-5821-5505
E-mail: gregjou@taisol.com.cn

China(Dong Guan)

Tel: 86-769-85321851
Fax: 86-769-85348074
E-mail: gregjou@taisol.com.cn
Japan

Tel: 81-90-3204-0614
E-mail: japan@taisol.com.tw

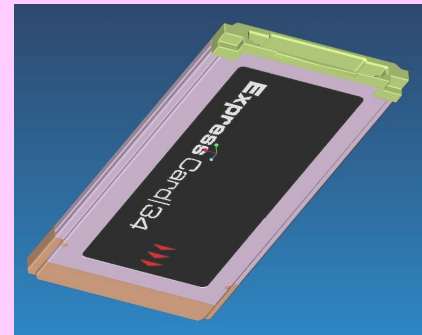

Applications

Desktop PC, Notebook PC

General Specifications

Mounting method

Surface mounting type

Mounting System

Standard mount

Media ejection structure

Push-push type

Operation temperature range

0°C to +55°C

Voltage proof

500V AC 1min

Insulation resistance (Initial)

1000MΩ min

Contact resistance (Initial)

30MΩ max

Mating and unmating cycle

10,000 cycles

Actual product layout may vary.
Specifications are subject to change without prior notice

Copyright©1999-2006 TaiSol, All rights Reserved.
All Trademarks are registered to their respective owners.