

## Product Features

- \* Pin Protection design
- \* Accepts for memory different specifications: SD Memory Card, MultiMediaCard, MemoryStickCard, xD Card
- \* Special mechanical structure design to prevent MS Duo Adapter insertion from circuit shorting
- \* Same card end

## Contact TaiSol for

### Alternative material and solution requirements

## TaiSol Group

### Taiwan

Tel: 886-2-265-2658  
Fax: 886-2-2656-2659  
E-mail: Sales@taisol.com.tw

### U.S.A

Tel: 1-650-861-9555  
Fax: 1-650-655-7201  
E-mail: sales@taisol.com

### Singapore(S.E.Asia)

Tel: 65-567-3008  
Fax: 65-567-3088  
E-mail: sales@taisol.com.sg

### China(Shanghai)


Tel: 86-21-5821-8606  
Fax: 86-21-5821-5505  
E-mail: gregjou@taisol.com.cn

### China(Dong Guan)

Tel: 86-769-85321851  
Fax: 86-769-85348074  
E-mail: gregjou@taisol.com.cn

### Japan

Tel: 81-90-3204-0614  
E-mail: japan@taisol.com.tw

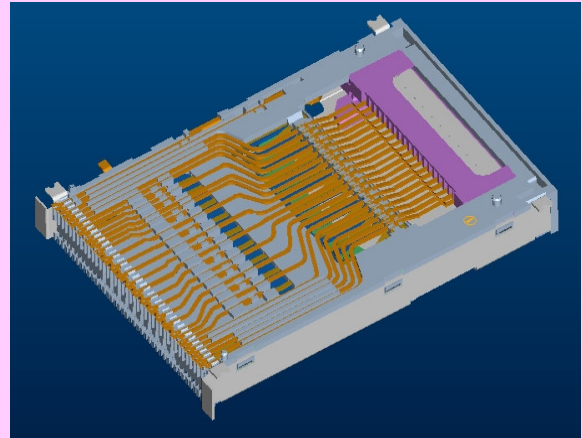

## Applications

Desktop PC, Notebook PC, Digital Cameras, Digital Camcorders, Printers, Fax Machine, Various Personal Digital Assistants, Home AV Devices, TV, Set Top Boxes Etc.

## General Specifications

### Mounting method

Surface mounting type

### Mounting System

Standard mount

### Media ejection structure

Push-push type

### Operation temperature range

-10°C to +60°C

### Voltage proof

500V AC 1min

### Insulation resistance (Initial)

1000MΩ min

### Contact resistance (Initial)

100MΩ max

### Mating and unmating cycle

Up to 12,000 plug-in cycles

Actual product layout may vary.  
Specifications are subject to change without prior notice

Copyright©1999-2006 TaiSol, All rights Reserved.  
All Trademarks are registered to their respective owners.