


# 4508 HEAT SINK SERIES

- LOW PROFILE
- HIGH AIR FLOW
- 4-WAY AIR CIRCULATION WITH IMPROVED BLADE
- HIGH LIFE EXPECTANCE




APPLICATIONS:SPECIAL FOR HIGH-SPEED VGA CARDS.

## SPECIFICATIONS

Model	Bearing B=Bearing S=Sleeve	Speed (RPM)	Rated Current (AMP)	Power Consumption (WATTS)	Air Flow (CFM)	Static Pressure mm-H <sub>2</sub> O	Noise (dBA)	Life Expect (Hrs)
S054508B7T	1B	7000	0.1	0.5	3.2	2.8	27	50000
S054508S7T	1S	7000	0.1	0.5	3.2	2.8	27	30000
S124508B7T	1B	7000	0.08	1.0	3.2	2.8	27	50000
S124508S7T	1S	7000	0.08	1.0	3.2	2.8	27	30000

Air Fow Tested	:	Without Heat Sink
Operating Voltage (Vdc)	:	4.0V - 6.0V FOR S05; 7.0V - 14.4V FOR S12
Direction Of Rotation	:	Counter - Clockwise Viewed From Fan Blade
Air Flow Direction	:	Sink Side ( 4 directions )
Operating Temperature	:	-10 to +70 Deg.C
Storage Temperature	:	-10 to +70 Deg.C
Bearing System	:	Precise Ball Bearing System
Weight	:	15g
Tolerances	:	15% On Rated Power & Speed

## DIMENSIONS

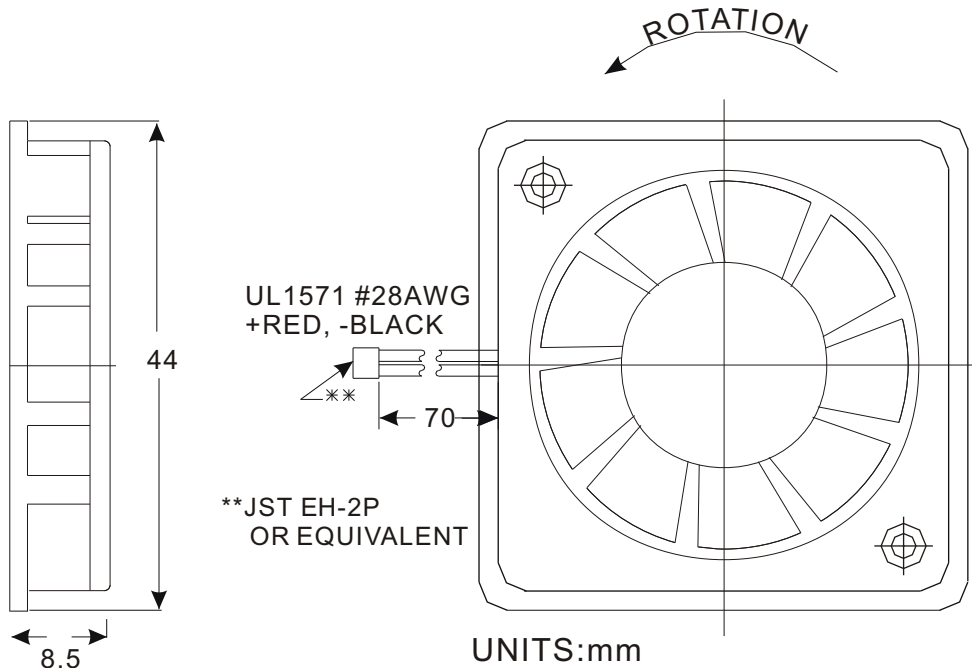

MORE INFORMATION PLEASE CONTACT:

**TAISOL ELECTRONICS CO., LTD.**

TEL:886-2-26981165

FAX:886-2-26981169

<http://www.taisol.com>

e-mail: [sales@taisol.com.tw](mailto:sales@taisol.com.tw)